

Axial Leaded PTC Resettable Fuse: FSR Series

1. Summary

- (a) **RoHS Compliant & Halogen Free**
- (b) **Applications: Rechargeable battery packs, Lithium cell and battery packs**
- (c) **Product Features: Low profile, Solid state**
- (d) **Operation Current: 1.2A~4.2A**
- (e) **Maximum Voltage: 15V~30VDC**
- (f) **Temperature Range : -40°C to 85°C**

2. Agency Recognition


UL: File No. E211981
 C-UL: File No. E211981
 TÜV: File No. R50004084

3. Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to Trip	Rated Voltage	Max. Current	Typ. Power	Resistance		
	I _H , A	I _T , A	at 5xI _H , S	V _{MAX} , VDC	I _{MAX} , A	Pd, W	R _{MIN}	R _{MAX}	R _{1MAX}
							Ohms	Ohms	Ohms
FSR120F	1.20	2.70	5.0	15	100	1.2	0.085	0.160	0.220
FSR175F	1.75	3.80	5.0	15	100	1.5	0.050	0.090	0.120
FSR200F	2.00	4.40	4.0	30	100	1.9	0.030	0.060	0.100
FSR350F	3.50	6.30	3.0	30	100	2.5	0.017	0.031	0.050
FSR420F	4.20	7.60	6.0	30	100	2.9	0.012	0.024	0.040


I_H=Hold current-maximum current at which the device will not trip at 23°C still air.
 I_T=Trip current-minimum current at which the device will always trip at 23°C still air.
 V_{MAX}=Maximum voltage device can withstand without damage at its rated current.
 I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).
 Pd=Maximum power dissipated from device when in tripped state in 23°C still air environment.
 R_{MIN}=Minimum device resistance at 23°C.
 R_{1MAX}=Maximum device resistance at 23°C, 1 hour after tripping.
 Physical specifications:
 Lead material:0.13mm nominal thickness, quarter-hard nickel.
 Insulating material: Polyester tape.

4. Production Dimensions (millimeter)

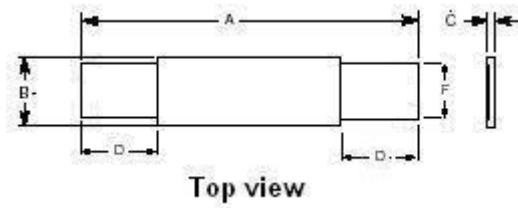

Part Number	A		B		C		D		F	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
FSR120F	19.9	22.1	4.9	5.2	0.6	1.0	5.5	7.5	3.9	4.1
FSR175F	20.9	23.1	4.9	5.2	0.6	1.0	4.1	5.5	3.9	4.1
FSR200F	21.3	23.4	10.2	11.0	0.5	1.1	5.0	7.6	4.8	5.4
FSR350F	28.4	31.8	13.0	13.5	0.5	1.1	6.3	8.9	5.9	6.1
FSR420F	30.6	32.4	12.9	13.6	0.5	1.1	5.0	7.5	5.9	6.1


5. Thermal Derating Curve

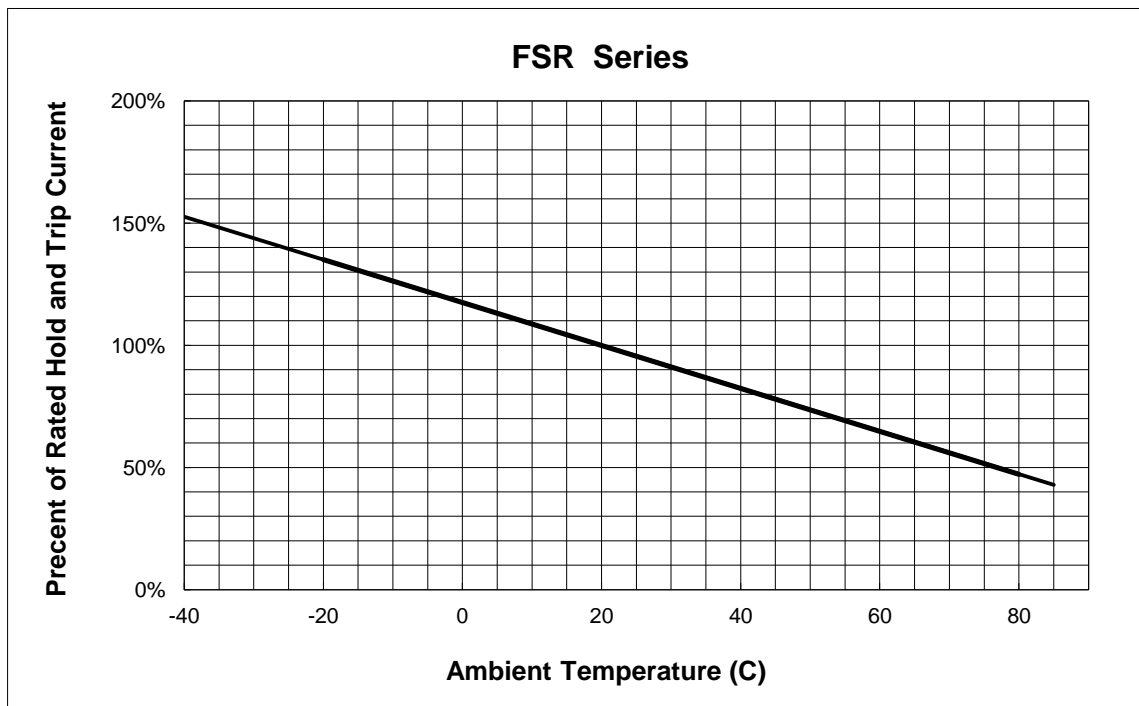

NOTE : Specification subject to change without notice.

6. Typical Time-To-Trip at 23°C

A = FSR120F
 B = FSR175F
 C = FSR200F
 D = FSR350F
 E = FSR420F

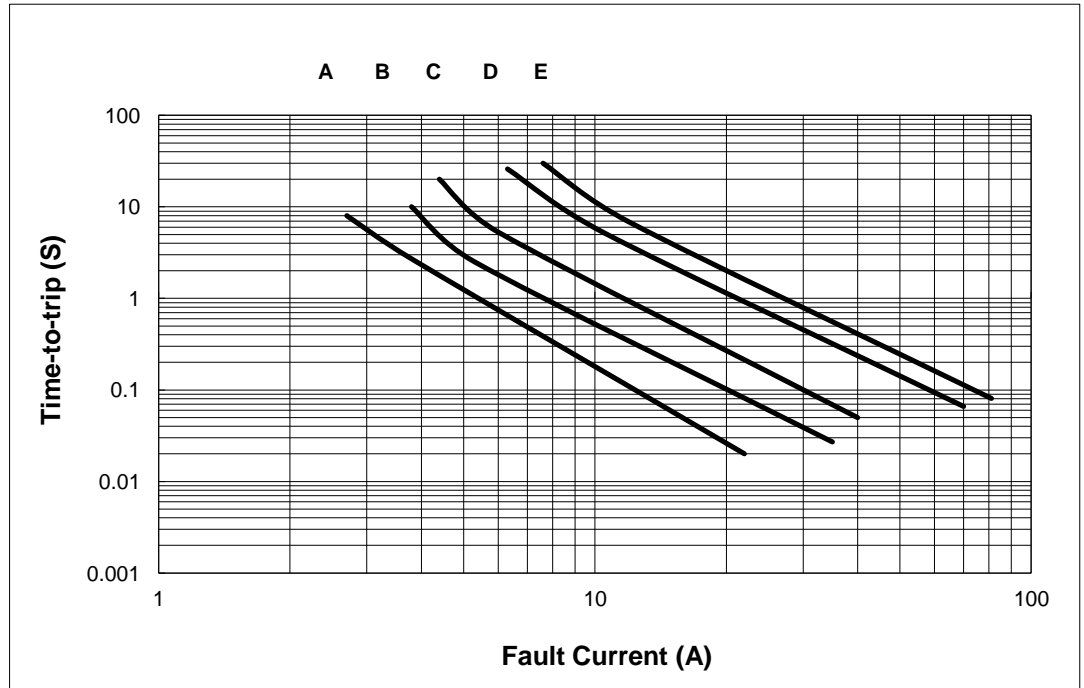

7. Material Specification



Lead material: 0.13 mm nominal thickness, quarter-hard nickel

Insulating material: Polyester tape

8. Part Numbering and Marking System


Part Numbering System

F SR □ □ □ F



Part Marking System

F SR □ □ □ F

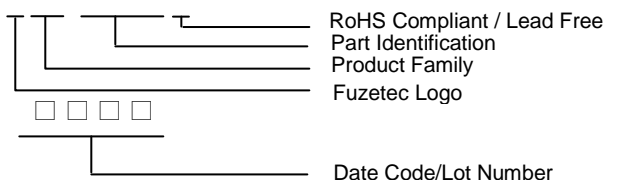

Warning: - Each product should be carefully evaluated and tested for their suitability of application.



- Operation beyond the specified maximum rating or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

NOTE : Specification subject to change without notice.